

A two screen cleaner that utilizes two 86" length decks. Each screen deck uses 3-26" screen sections. This Seed Cleaner is designed to pre-clean and offers a top shoe assembly with a scalp screen setup and a bottom shoe assembly with a sift screen.

## STANDARD FEATURES:

- 4" square tubing frame that is 1/4" thick
- Reverse incline back fan unit to develop up to 6400 CFM. Drive setup can easily be change to match air and electrical requirements
- Air lock discharge trash auger with bottom access door for ease of cleanout
- Electronic variable speed vibratory inlet feed hopper with adjustable internal gate for uniform seed flow thru air column and onto screens
- Calibrated air gate control for precise settings and air separation.
- New style screen cleaning ball trays so that screens can be changed without removing ball trays
- Replaceable metal screenways and rubber screen seals for ease of future repair
- New style shoe hangers and drive connectors smooth counterbalanced operation

## CAPACITIES:


Range up to 1000 BPH (27.2MTH) of market cleaning

**Note:** Capacities may vary depending on seed condition, moisture content, seed varieties, types and volumes of contaminants to be separated and the percentage of foreign material accepted in the final product.

## AIR OUTPUT:

6,400 CFM

## The Conquest 286 Pre-Cleaner

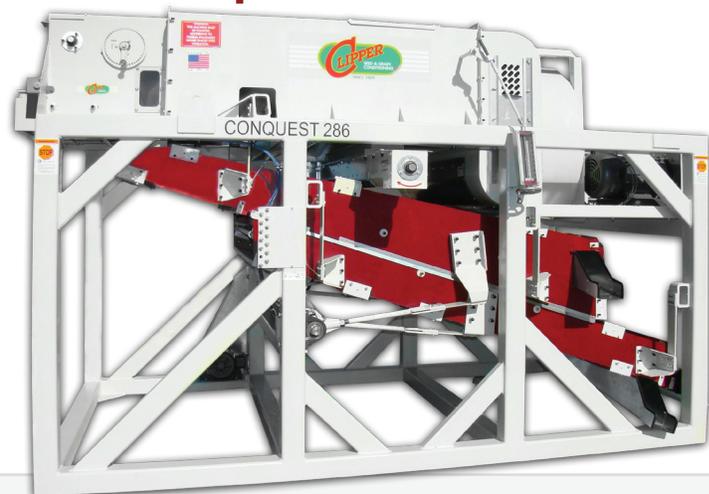

## OPTIONS:

- Over 150 different screen sizes available.
- Grease line package to grease machine for central location.
- Side mounted control panel to control electronic variable speeds from one location.
- Various motor drive packages of 50 or 60 hertz, single or three phase, TEFC or Ex-Proof



SEAN MCGIVERN  
NORTH VALLEY AG & MILL

EMAIL: [sean@northvalleyagme.com](mailto:sean@northvalleyagme.com)  
WEB: [www.NorthValleyAgMe.com](http://www.NorthValleyAgMe.com)

PH: (519) 374-9300 or (902) 393-9097

