

Clipper Quality & Craftsmanship "Engineered Without Compromise". The Ceres 686 is what happens when we take everything that we've learned over the last 140 years and apply it to a clean sheet design. The newest six screen cleaner that utilizes 3-54" x 26" screen sections in each deck. A total of 175.5 Square feet of screen area. The New Ceres 686-2-4 cleaner offers a top shoe assembly with a split-scalp, scalp-scalp, or scalp-sift flow. The bottom shoe assembly also has 3 different flows so there 9 total flows that come standard with the machine



STANDARD FEATURES:

- 4" square tubing frame that is 1/2" (12.70mm) thick overall on most areas.
- Exclusive 1/2" throw on eccentric drive of cleaning shoes for smooth seed flow and maximum seed separation.
- Reverse incline back fan unit to develop up to 11,000 CFM @ 5" SP with 15 Hp drive. Drive setup can easily be changed to match air and electrical requirements.
- Electronic variable speed vibratory inlet feed hopper with adjustable internal gate for uniform seed flow thru air column and onto screens.
- New style heavy duty screen cleaning ball trays so that screens can be changed without removing ball trays.
- 2 calibrated air gate controls that work in combination with back adjustable doors for precise air separation settings.
- Replaceable metal screenways and rubber screen seals for ease of future repair.
- New style shoe hangers and drive connectors for smooth counterbalanced operation.
- Air lock discharge trash augers with bottom access door for ease of cleanout.
- Multiple sizing and grading options, 9 different flows available.
- Quick and easy screen release, no tools required on most flow options.
- Safe seed edge molding, reduces seed coat damage.

OPTIONS:

- Over 150 different standard screen sizes available with additional screen sizes available upon request.
- Bottom blast fan integrated into existing frame for specialized air separation requirements.
- Grease line package to grease machine from central location.
- Various motor drive packages of 50 or 60 Hertz, Single or Three phase, TEFC or Ex-Proof.
- Side mounted control panel to control electronic variable speeds from one location.
- Calibrated hopper gate control extended down to side of machine for ease of internal gate adjustment.
- 36" or 48" stands available to elevate cleaner if needed.
- Clean seed conveyors from 5 to 15 feet to convey seed away from cleaner.

ELECTRICAL REQUIREMENTS:

Main Fan Motor	15 H.P./11.3 Kw
Eccentric Motor	3 H.P./2.25 Kw
Vibratory Feeder Motor	1/2 H.P./375 Kw

AIR OUTPUT:

8,400 to 11,000 CFM



SEAN MCGIVERN
NORTH VALLEY AG & MILL

PH: (519) 374-9300 or (902) 393-9097

EMAIL: sean@northvalleyagme.com
WEB: www.NorthValleyAgMe.com




TECHNICAL SPECIFICATIONS:

Extreme Height	133 inches / 338 cm
Extreme Width	87 inches / 224 cm
Extreme Length	173 inches / 437 cm
Width on Floor	71.5 inches / 182 cm
Length on Floor	170 inches / 432 cm

CAPACITIES:

Small Seed	200-375 BPH (5.4-10.2 MT/Hr.)
Medium Seed	400-650 BPH (5.0-8.80 MT/Hr.)
Large Seed & Wheat	600-900 BPH (17.68-24.48 MT/Hr.)
Market / Pre Cleaning	1200-2000 BPH (32.65-54 MT/Hr.)

Note: *Capacities may vary depending on seed condition, moisture content, seed varieties, types and volumes of contaminants to be separated and the percentage of foreign material acceptable in the final product.

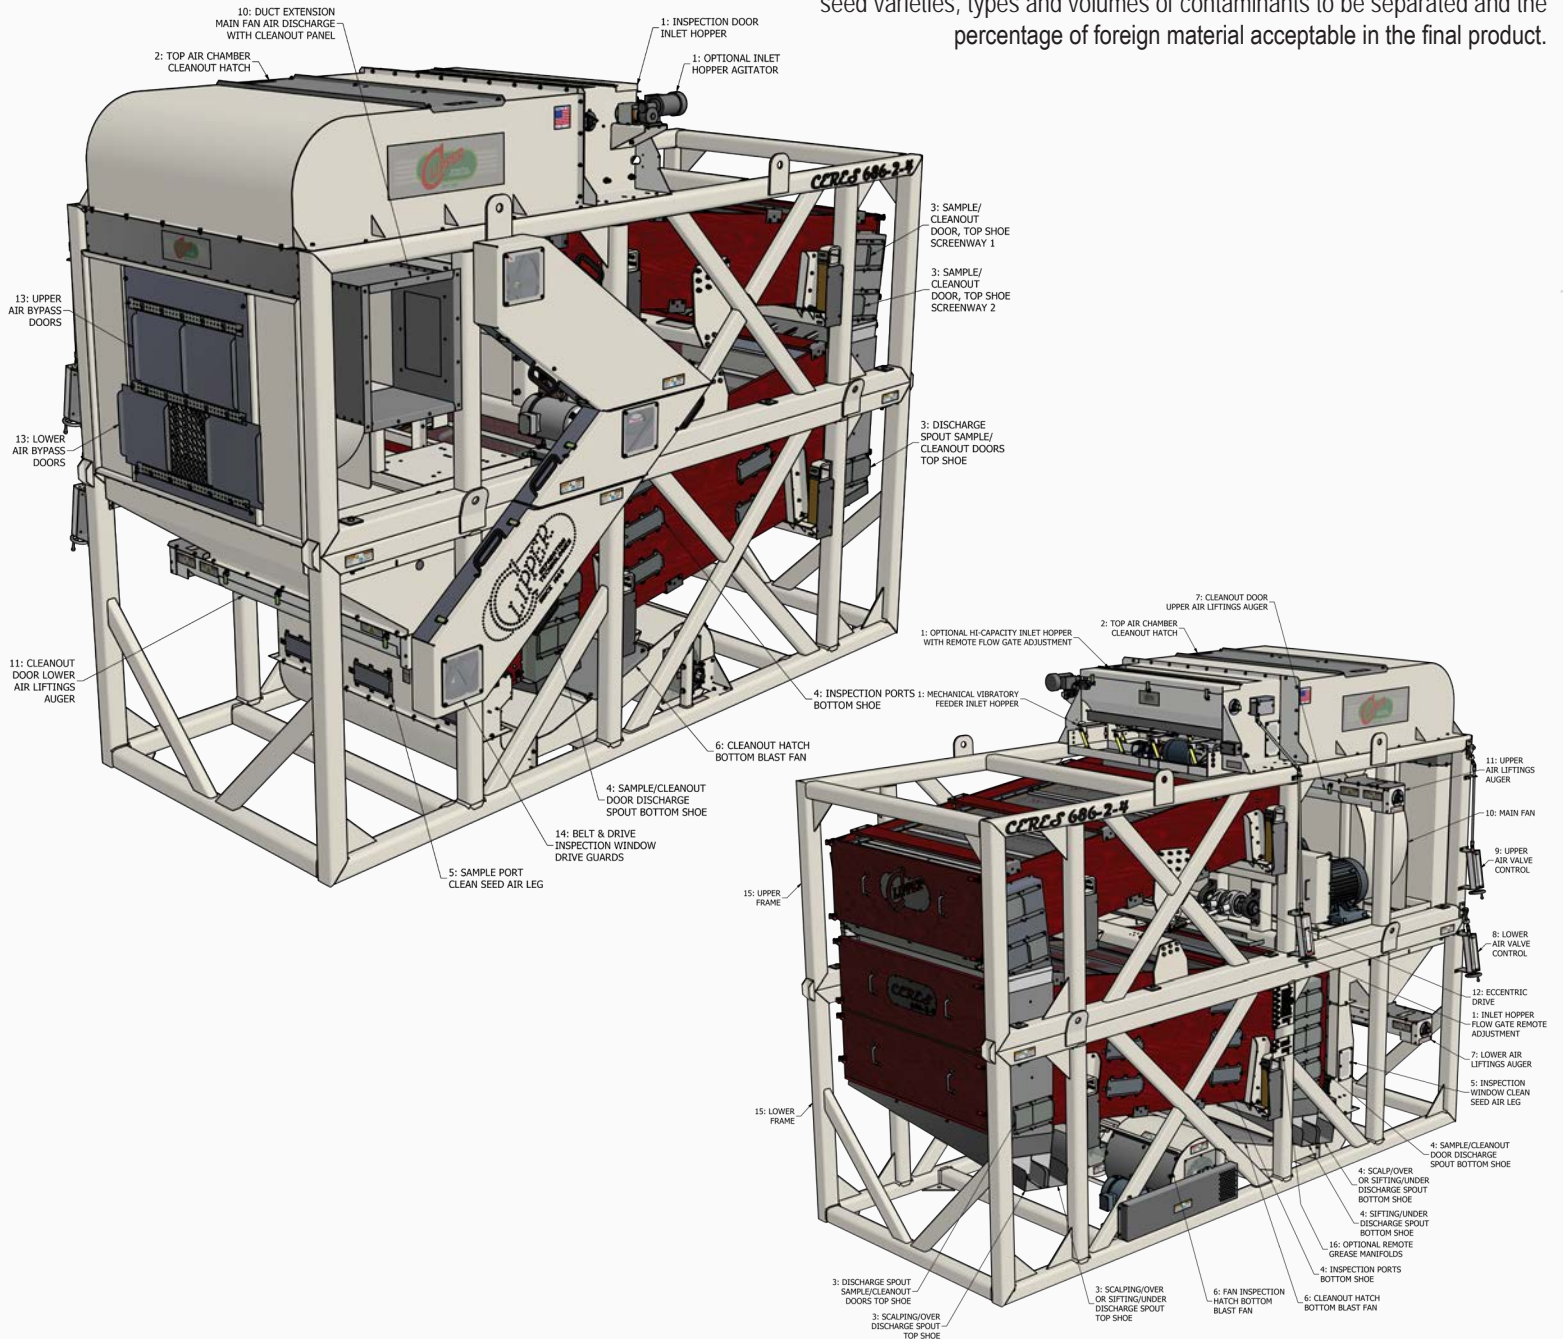

SEAN MCGIVERN
NORTH VALLEY AG & MILL

EMAIL: sean@northvalleyagme.com
WEB: www.NorthValleyAgMe.com

PH: (519) 374-9300 or (902) 393-9097

