


The Forsberg's Impact Huller provides efficient, thorough hulling of sunflower seeds and oats for further separation of hulls and meats.

Simple, accurate control features place the operator in total control of the hulling operation.

## MODEL 15-D IMPACT HULLER

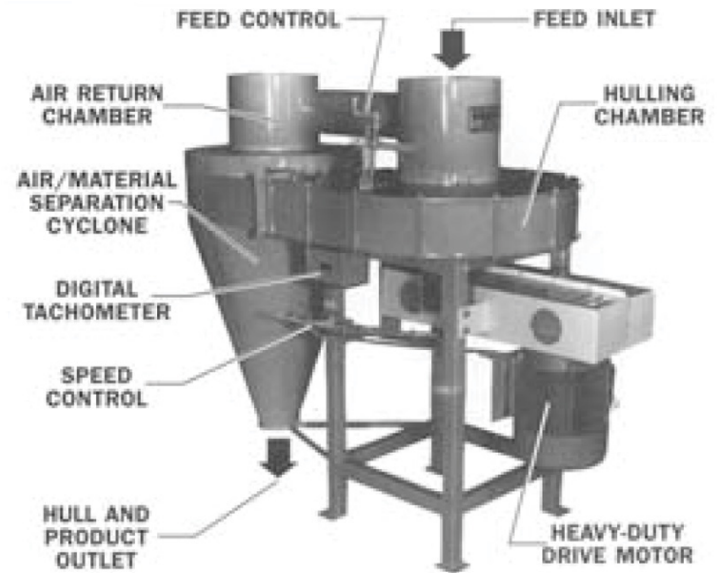

**FORSBERGS, INC.**

The product is fed into the inlet where it enters the impeller wheel through the feed control pipe. Accurate crank adjustment of the feed control determines the thoroughness of the hulling operation. The centrifugal force of the rotating impeller wheel drives the product against the hulling ring. Both the impeller and hulling ring are constructed of a durable borallloy steel for wear resistance.

From the hulling chamber, the hulled product and any dust that has accumulated, enters the cyclone and is discharged out the bottom for further handling and processing. The air that is used is retained in the machine and continually recycled.

Moisture, temperature and density play an important role in hulling efficiency. Product should be uniformly sized prior to hulling for best results.

LENGTH	WIDTH	HEIGHT	HORSEPOWER	RPM	CAPACITY
70 inches	39 inches	57 inches	7-1/2	Varies	Various Factors

### EXAMPLES:

Confectionery Sunflowers - Approx. 1500 lbs./ hr input

Oil Sunflowers - Approx. 1500 lbs./ hr input

Oats - Approx. 2600 lbs./ hr input