

4-Bagger Conveyor with Portable Sewing Head

JEM has been manufacturing durable bagging scales for over 35 years. For handling free flowing products into open mouthed bags their product line includes:

- Mechanical Scales
- Digital Gross Weigh Scales - Product weighed in the bag
- Digital Net Weigh Scales - Pre-weighed Product that is discharged into a bag



Shown with GWM Wolverine Gross Weigh Mechanical Bagging Scale

THE 4-BAGGER CONVEYOR SYSTEM

Designed for one operator to bag fill, close and stack at a rate of 4 bags per minute.

The 8-foot bag closing conveyor includes:

- a 12-inch-wide belt
- 1HP AC motor with variable speed, back rail
- two-position foot pedal and wand switch for single operator controls

- An adjustable height portable pedestal for use with Newlong or Fischbein Portable Sewing Heads or an AIE Impulse heat sealer.



THE GWM WOLVERINE

The Wolverine provides an economical approach to filling bags from 10 lbs. to 110 lbs. (5 kg – 50kg).



**WATCH THE
4 BAGGER
CONVEYOR IN USE**

- Typical production speeds are 4 to 5 bags per minute at +/- 4 ounce (100 gram) accuracy.
- GWM scales can be supplied with a variety of spout sizes to accommodate your specific bag dimensions.
- Flex-Belt and Auger feeders are available to handle products that are not free flowing in nature.
- The scales are available in mild 10 gauge steel or can be supplied with stainless steel product contact surfaces or all stainless steel construction for corrosive or food grade products such as salt, fertilizer and various food products.
- The GWM comes standard with a cam grip spout sized for your specific bags.
- For dusty products please inquire about – C Dust
- The gross weigh baggers (GWM) have a minimum of moving parts for maximum efficiency and lower maintenance.





NP-7A SINGLE THREAD CHAIN STITCH

Ideal for closing bags for agricultural products, animal feeds, fertilizer, flour, chemicals, etc.


- For kraft paper, cotton, hessian, jute, PP/PE woven cloth and other bag materials.
- High-speed revolution: 1,700 - 1,900 rpm (+/- 200 r.p.m)
- 8.5 mm (fixed) / 3 stitches per inch
- Safety plastic handle for insulation
- Automatic thread cutter
- Uses needle: DNx1 #25
- Oil pump lubrication. Uses Tellus #32 oil.
- Steel cam (no plastic parts)

- Minimum maintenance
- Weight: 6kg(13 lbs.) with thread
- Drive motor: 65~70W 50/60Hz, 1-ph.12V, 24V, 110V, 220V or 240V



4-Bagger Conveyor with Portable Sewing Head *cont'd*

DIMENSIONS OF 4 BAG CONVEYOR:

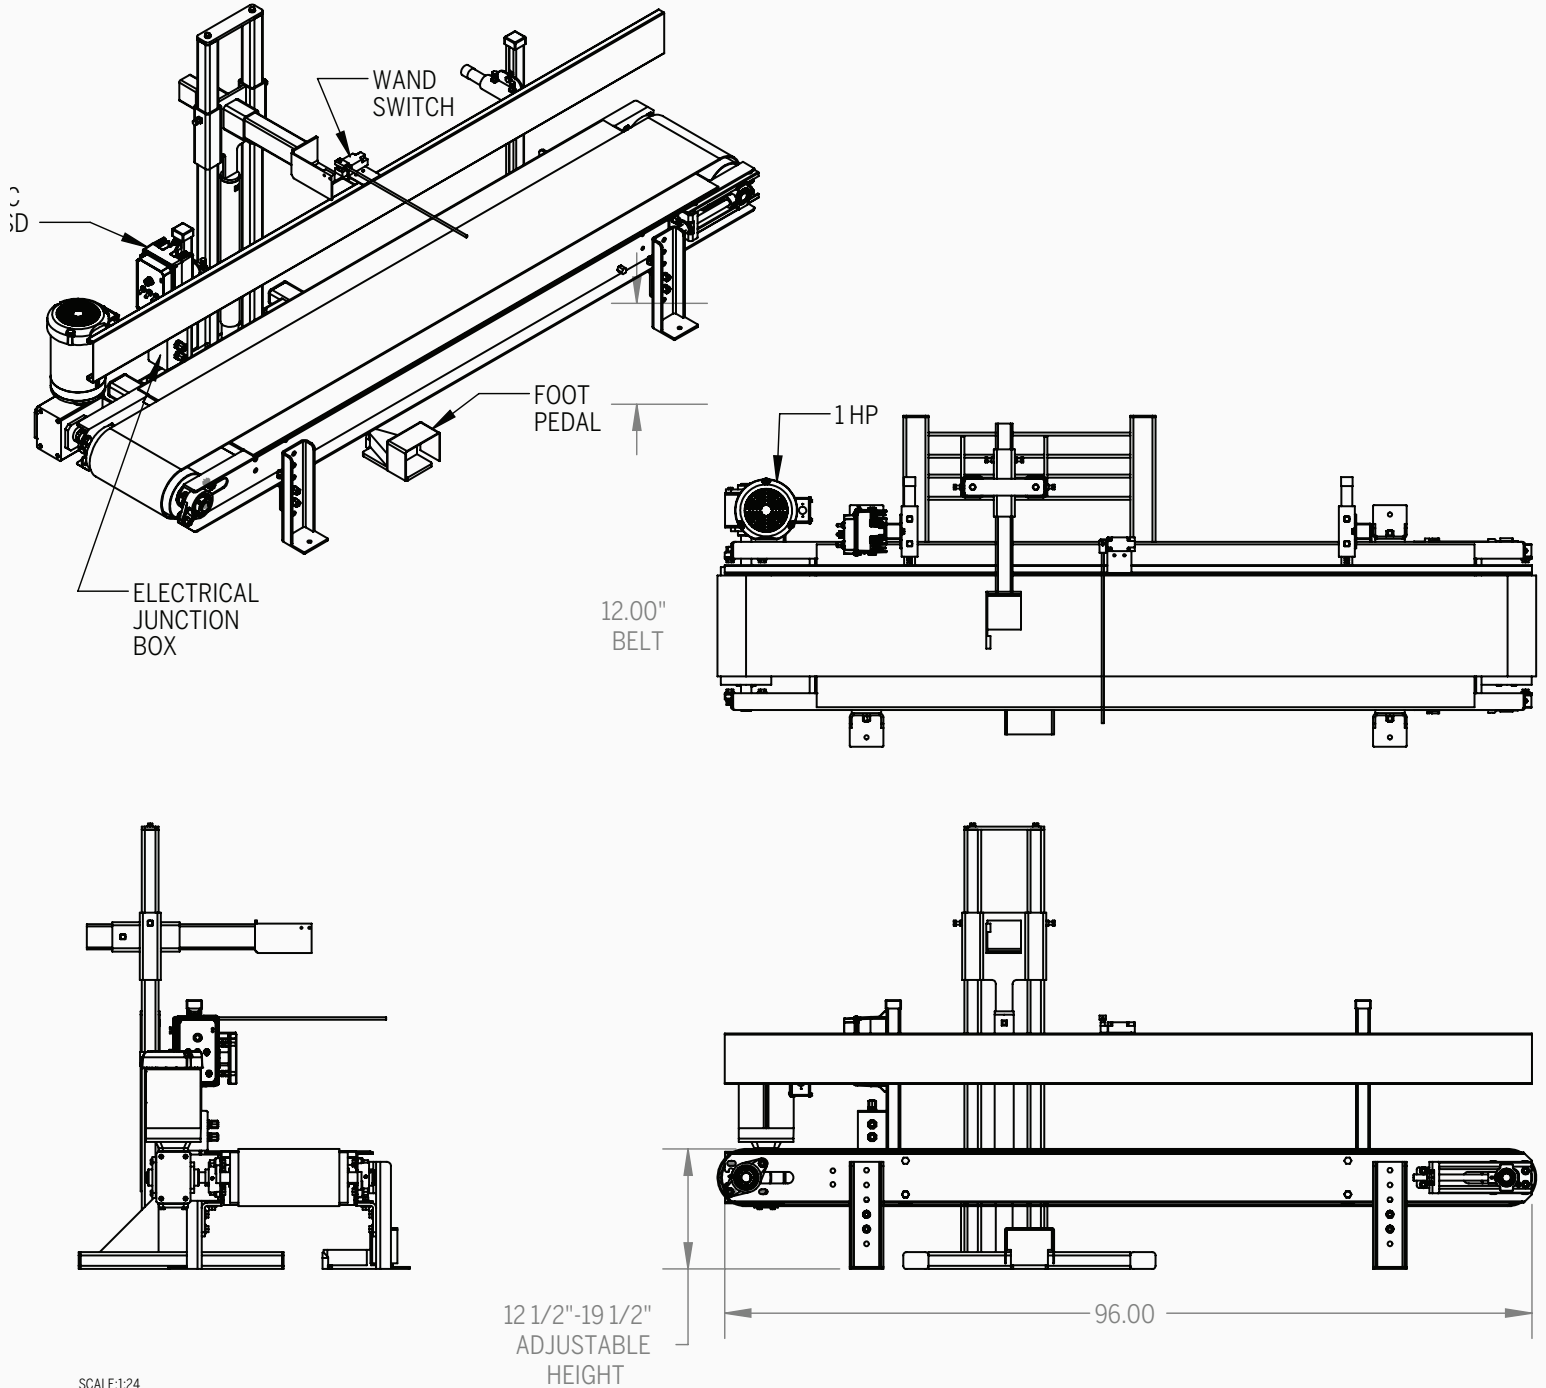

ELECTRICAL: 110V 1 PH @ 5 AMPS
220V 1 PH @ 5 AMPS

4 BAGGER CONVEYOR
WITH PEDESTAL